FIRST ANGLE PROJECTION

REMOVE ALL BURRS AND SHARP EDGES

ISSUE	REVISION	MOD No.	DATE
F	SEE MOD NOTE	10503	18-Jan-07
E	SEE MOD NOTE	10480	11-Jan-07
D	SEE MOD NOTE	10392	27-Nov-06
C	SEE MOD NOTE	10377	21-Nov-06
B	SEE MOD NOTE	10232	31-Aug-06

BASIC DIMENSIONS OF GALVANISED DELTA ANCHOR © © © © Ⓓ

	A	B	C	D	E	F	G	ØH	I	J	K (kg)
4 kg	217 ±4	514 ±10	230 ±9	8 -0/+1,7	210 ±4	387 ±8	4 ±0,4	8 ±0,4	116 ±2,3	71 ±1,4	1,5
6 kg	254 ±5	593 ±12	265 ±11	10 -0/+1,7	243 ±5	450 ±9	4 ±0,4	10 ±0,4	148 ±3,0	81 ±1,6	2,7
10 kg	293 ±6	695 ±14	310 ±12	12,5 -0/+1,7	282 ±6	526 ±10	5 ±0,4	10 ±0,4	172 ±3,4	95 ±1,9	4,0
16 kg	339 ±7	812 ±16	362 ±14	12,5 -0/+1,7	328 ±6	614 ±12	5 ±0,4	12 ±0,4	205 ±4,0	114 ±2,2	6,1
20 kg	370 ±7	877 ±18	392 ±16	16 -0/+1,9	357 ±7	663 ±13	6 ±0,4	12 ±0,4	225 ±4,5	123 ±2,5	8,0
25 kg	397 ±8	945 ±19	415 ±17	16 -0/+1,9	387 ±8	713 ±14	6 ±0,4	12 ±0,4	245 ±4,9	135 ±2,7	9,9
Ⓑ 32 kg	425 ±8	1023 ±20	453,5 ±18	20 -0/+1,9	425 ±8	775 ±15	8 ±0,4	16 ±0,5	254 ±5,0	142 ±2,8	10,8
40 kg	461 ±9	1099 ±22	489 ±20	20 -0/+1,9	435 ±9	833 ±16	8 ±0,4	16 ±0,5	265 ±5,3	154 ±3,1	13,7
50 kg	486 ±10	1175 ±24	523 ±21	20 -0/+1,9	479 ±10	890 ±18	8 ±0,4	16 ±0,5	282 ±5,6	158 ±3,2	18,2
63 kg	537 ±11	1270 ±25	567 ±23	22 -0/+1,9	508 ±10	963 ±19	8 ±0,4	25 ±0,5	290 ±5,8	171 ±3,4	24,6

BASIC DIMENSIONS OF ST/ST DELTA ANCHOR © © © © Ⓓ

	A	B	C	D	E	F	G	ØH	I	J	K (kg)
6 kg	254 ±5	593 ±12	265 ±11	10 ±0,43	243 ±5	450 ±9	4 ±0,5	10 ±0,4	148 ±3,0	89 ±1,8	1,6
10 kg	293 ±6	695 ±14	310 ±12	12,5 -0/+1,5	282 ±6	526 ±11	5 ±0,5	10 ±0,4	172 ±3,4	104 ±2,1	2,8
16 kg	339 ±7	812 ±16	362 ±14	12,5 -0/+1,5	328 ±7	614 ±12	5 ±0,5	12 ±0,4	205 ±4,0	114 ±2,3	6,1
20 kg	370 ±7	877 ±18	392 ±16	16 -0/+1,5	357 ±7	663 ±13	6 ±0,5	12 ±0,4	225 ±4,5	122 ±2,4	6,0
25 kg	397 ±8	945 ±19	415 ±17	16 -0/+1,5	387 ±8	713 ±14	6 ±0,5	12 ±0,4	245 ±4,9	121 ±2,4	8,8
Ⓔ 32 kg	432 Ⓕ ±8	1028 Ⓕ ±20	446 ±18	20 -0/+1,5	407 ±8	774 ±15	8 ±0,5	16 ±0,5	250 ±5,0	143 Ⓕ ±2,8	6,5 Ⓕ
40 kg	461 ±9	1099 ±22	489 ±20	20 -0/+1,5	435 ±9	833 ±17	8 ±0,5	16 ±0,5	265 ±5,3	164 ±3,3	10,7
50 kg	486 ±10	1175 ±24	523 ±21	20 -0/+1,5	479 ±10	890 ±18	8 ±0,5	16 ±0,5	282 ±5,6	167 ±3,3	17,2
63 kg	537 ±11	1270 ±25	567 ±23	22 -0/+1,5	508 ±10	963 ±19	8 ±0,5	25 ±0,5	290 ±5,8	185 ±3,7	18,3

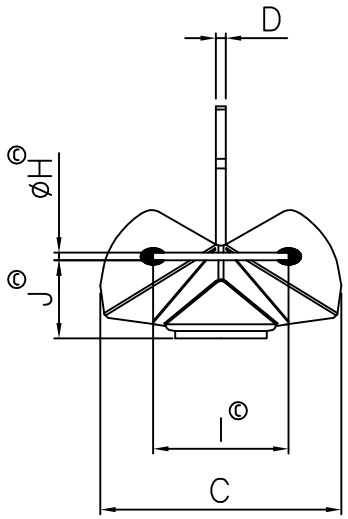

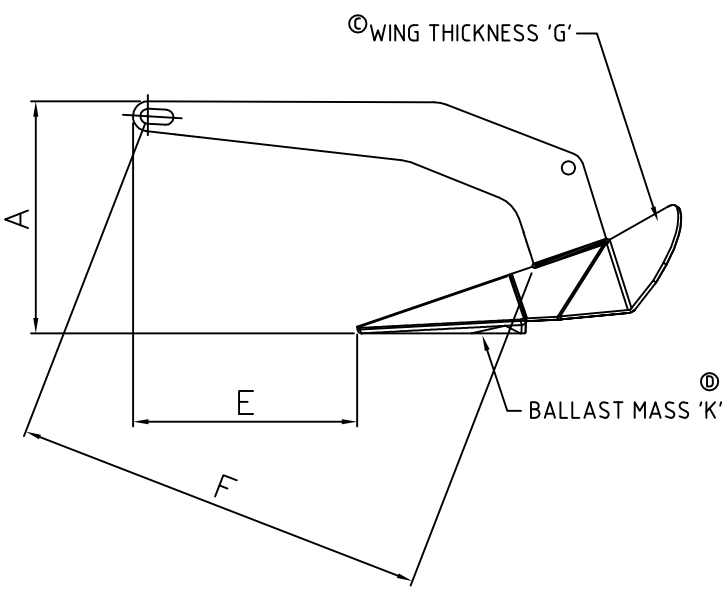

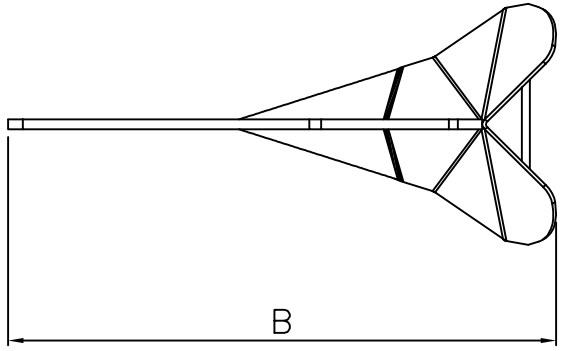

Ⓓ NOTE:
FOR GALVANISED ANCHORS - STEEL BALLAST IS WELDED DIRECTLY TO WINGS.
FOR ST/ST ANCHORS - LEAD BALLAST IS HELD INSIDE WELDED CHAMBER.

ORIGINAL SIZE A2

0 10 20 30 40 50

REFERENCE SCALE IN MM

Unauthorised use, manufacture or reproduction in whole or in part is prohibited

PART No. 60000431

MATERIAL	ALL DIMENSIONS IN mm	DRN MD	TITLE DELTA ANCHOR SPECIFICATION
	TOLERANCES (AS STATED)	DATE 17-July-06	
FINISH		SCALE NTS	PART No. 60000431
	MODEL NAME:		LEWMAR